

BINDINGAGENTS SPREADER



CS 2-12 | CS 3-18

<http://amag.de>



CEMENTSPREADER

HIGHLIGHTS



- Easy to use control terminal — manual / automatic
- Exact spreading of binding agent
- Variable working width / split dosing roller



- All-wheel-drive for difficult ground conditions
- Wide tyres with open centre tread design
- Road legal with speeds of up to 88km/h
- Self-propelled construction vehicle



- On-board weighing system
- Filter system for dust-free filling
- Dust-vacuum system for dust-free spreading
- Dust curtain at the metering shaft
- 40t trailer weight / 66t train weight



Technical Data	CS 2-12	CS 3-18
Container	12m ³	18m ³
Filling interface	3"	
Screw conveyors	4	6
Spreader Mechanism		
Dosing system	Aluminium	
Output quantity ¹	5 - 60 kg/m ²	5 - 60 kg/m ²
Spreading width	2500 mm / optional 1/2 2/3 split	
Vehicle	IVECO EUROCARGO / MAN TGM	MAN TGS
Axles	2	3
Engine	Cursor / D8	D15
Cylinder	6	
Displacement	6 l	9 l
Power	250 ps	400 ps
Fuel	200 l Diesel / 25 l AdBlue	400 l Diesel / 35 l AdBlue
Unladen weight	8.5 t	16 t
Total permissible weight StVO	18 t	26 t
Total permissible weight manufacturer		33 t
Trailer weight	-	40 t
Tyres	315/80 R22.5	
Electrical system	24V	
Dimensions L x W x H	6.42 x 2.53 x 3.23 m	8.11 x 2.53 x 3.49 m

¹ Output quantity varies dependant on binding agent density and vehicle speed




Twin dosing roller required for max amount

Equipment	CS 2-12	CS 3-18
Control terminal	■	
Fill level indicator	■	
Infinitely variable spreading volume	■	
Twin dosing roller	□	■
Variable spreading width 1/3 — 2/3 split	□	
Tool storage	■	
Lighting package with 4 LED working lights	■	
Ladder	■	
Access hatch	■	
All-wheel-drive chassis	■	
Road legal 0 — 88 km/h	■	
Wide tyres with open centre tread design/ AS profile	□	
Filling interface Storz, alternative on request	■	
Filling interface 4" or 5"	□	
Filter system for dust-free filling	□	
Dust-vacuum system for dust-free spreading	-	□
On-board weighing system	□	□
Paintwork	RAL 9001	
Custom paintwork	□	
Increased power output up to 530 ps	-	□
Alternative chassis	on request	-

■ Standard □ Optional

CS 2-12



Dimensions

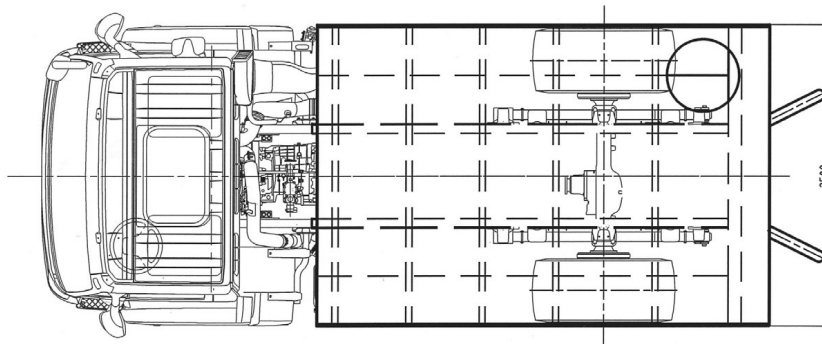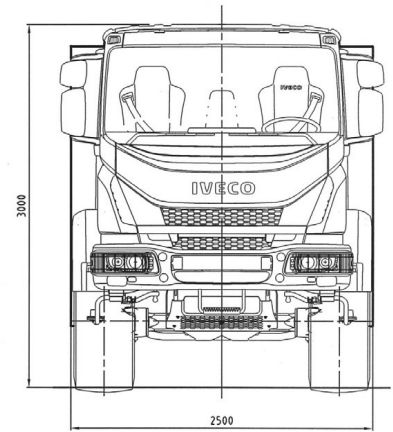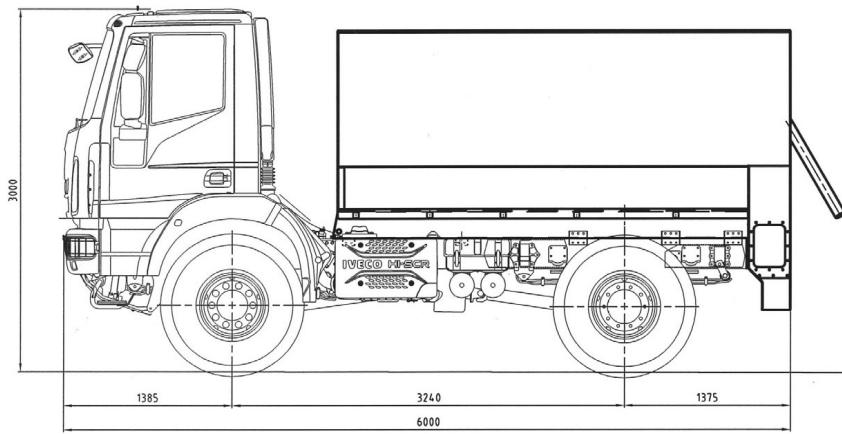


2 axle
12m³ Capacity

CS 3-18

3 axle
18m³ Capacity

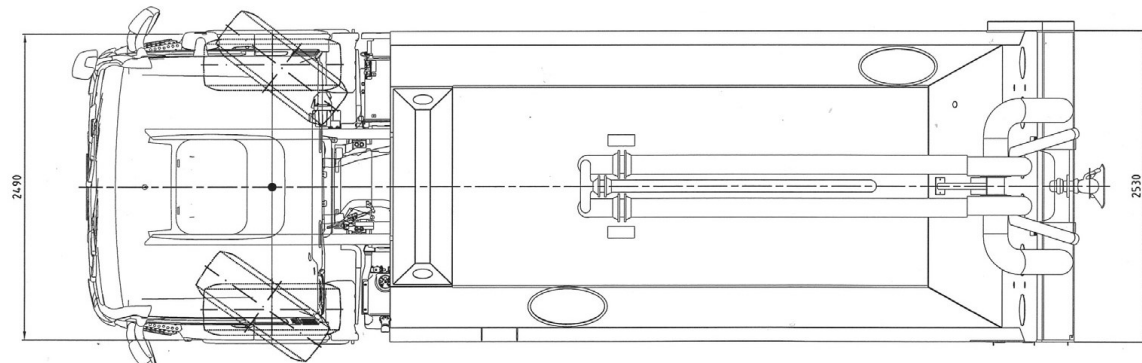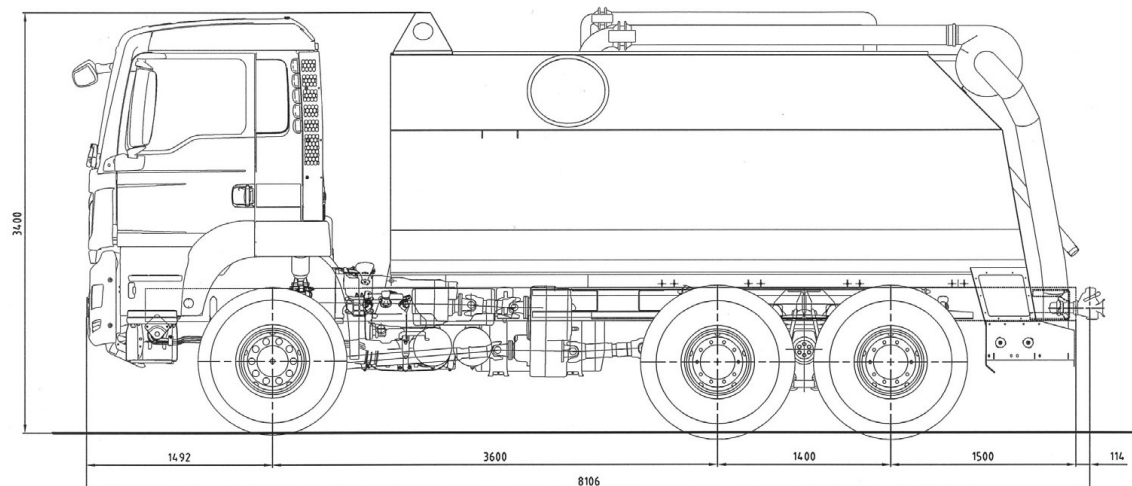

Innovating since 1957



amag GmbH

Hauptstrasse 100
56745 Bell
Germany

+49-2652-93936-0

info@amag.de

<http://amag.de>

